


**NTN BEARING CORPORATION OF AMERICA**

Head Office

1600 E. Bishop Court, P.O. Box 7604

Mount Prospect, IL 60056-7604, U.S.A.


**Phone:** 847-298-7500

**Fax:** 847-699-9744

**Toll Free:** 800-323-2358

**Email:** [mkt@ntnamerica.com](mailto:mkt@ntnamerica.com)
**Website:** [www.ntnamericas.com](http://www.ntnamericas.com)

## Item # UELFL207-104D1, Two Bolt Rhombus Flanged Unit, Cast Housing, Eccentric Locking Collar, UELFL Type

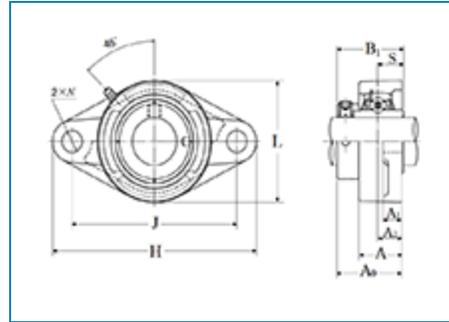

[Order Now](#) | [Technical Specifications](#) | [Dimensional Specifications](#)

### Order Now

#### Ordering Options


[FIND A DISTRIBUTOR](#)
[CONTACT NTN CUSTOMER SUPPORT SPECIALIST](#)
[ORDER THROUGH NTN DOL \(AUTHORIZED DISTRIBUTORS ONLY\)](#)

### Technical Specifications

Type	2-Bolt Rhombus Flanged Unit
Bearing Type	Ball Bearing

<b>Locking Device</b>	Eccentric Locking Collar
<b>Seal Type</b>	Contact
<b>Seal Material</b>	Nitrile Rubber
<b>Bearing Number</b>	UEL207-104D1
<b>Housing Number</b>	FL207D1
<b>Housing Material</b>	Cast Iron
<b>Housing Construction</b>	1 Piece
<b>End Type</b>	Open
<b>Performance</b>	Light Duty
<b>Dynamic Load Rating</b>	5778 lbf 25700 N 25.70 kN
<b>Static Load Rating</b>	3440 lbf 15300 N 15.30 kN
<b>Rotational Speed [Max]</b>	4200 RPM
<b>Weight</b>	2.911 lb 1.320 kg
<b>Operating Temperature Range</b>	-40 to 250 °F -40 to 120 °C
<b>Lubrication</b>	Relubricatable

## Dimensional Specifications

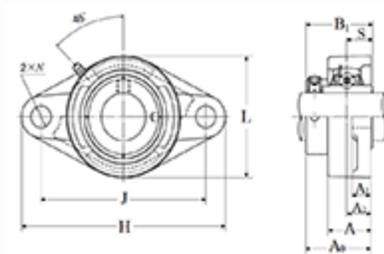

Two Bolt Rhombus Flanged Unit, Cast Housing, Eccentric Locking Collar, UELFL Type - Dimensions

<b>d</b>	1.2500 in 31.750 mm
<b>H</b>	6.3437 in 161.0 mm
<b>L</b>	3.5312 in 90.0 mm
<b>J</b>	5.1250 in 130.0 mm
<b>A</b>	1.3437 in 34.0 mm
<b>A1</b>	0.5937 in 15.0 mm
<b>A2</b>	0.7500 in 19.0 mm
<b>N</b>	0.6250 in 16.0 mm
<b>B1</b>	2.0118 in 51.100 mm
<b>S</b>	0.7402 in 18.800 mm
<b>F</b>	0.1811 in 4.600 mm