


NTN BEARING CORPORATION OF AMERICA

Head Office

1600 E. Bishop Court, P.O. Box 7604

Mount Prospect, IL 60056-7604, U.S.A.


Phone: 847-298-7500

Fax: 847-699-9744

Toll Free: 800-323-2358

Email: mkt@ntnamerica.com
Website: www.ntnamericas.com

Item # UEL209-110D1, Bearing Insert w/ Eccentric Locking Collar, Wide Inner Ring - Spherical O.D.

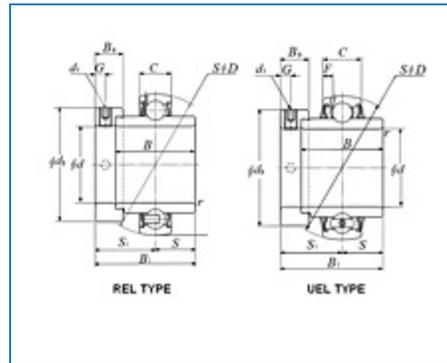

[Order Now](#) | [Technical Specifications](#) | [Dimensional Specifications](#)

Order Now

Ordering Options

[FIND A DISTRIBUTOR](#)
[CONTACT NTN CUSTOMER SUPPORT SPECIALIST](#)
[ORDER THROUGH NTN DOL \(AUTHORIZED DISTRIBUTORS ONLY\)](#)


Technical Specifications

Type

Insert Bearing

Bore Type	Round
Bearing Type	Ball Bearing
Material	Through Hardened Steel
Ball Material	Steel
Limiting Speed - Grease	3500 RPM
Seal Type	Contact
Seal Material	Nitrile Rubber
Performance	Standard Duty
Configuration	One
Locking Device	Eccentric Locking Collar
Locking Device Part Number	EL209-110
Lubrication	Relubricatable
Basic Outer Ring	209
Radial Internal Clearance	CN
Static Load Rating	4586 lbf 20400 N 20.40 kN
Dynamic Load Rating	7306 lbf 32500 N 32.50 kN
Enclosure	Double Sealed
Weight	2.051 lb 0.930 kg
Operating Temperature Range	-40 to 250 °F -40 to 120 °C

Dimensional Specifications

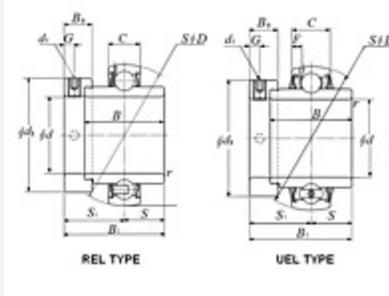

Bearing Insert w/ Eccentric Locking Collar, Wide Inner Ring - Spherical O.D. - Dimensions

d	1-5/8 in 41.275 mm
D	3.3465 in 85.000 mm
C	0.8661 in 22.000 mm
B	1.6850 in 42.800 mm
B1	2.2165 in 56.300 mm
r	0.0591 in 1.500 mm
ds	3/8-24 UNF
G	0.2677 in 6.800 mm
d3	2.5000 in 63.500 mm
B5	0.7205 in 18.300 mm
S1	1.3740 in 34.900 mm
S	0.8425 in 21.400 mm
F	0.1929 in 4.900 mm

